


## EZ Toric IOL Single Piece

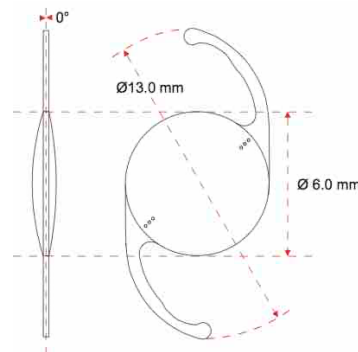

PT302A  
Preloaded delivery System

IOL Design	Single Piece posterior chamber lens for placement in the capsular bag
Material	Hydrophobic UV+blue-light filtering acrylic polymer
Model	Preloaded: SAL PT302A
Optic Diameter	6.0mm
Overall Length	13.0mm
Haptic Angle	0° Planar, modified C-Loop
Optic Design	Biconvex, square edged optic and haptics
Diopter Range	Available in spherical equivalent powers from +5.0D to +34.0D +5.0D to +10.0D in 1.0D steps +10.0D to +30.0D in 0.5D steps +30.0D to +34.0D in 1.0D steps
Cylinder	1.0D to 6.0D in 0.5D steps
Refractive index	1.50
Material Water Content	< 0.5%
A-Constant*	Nominal :118.7, SRKII :119.2 SRKT:118.9, SF:1.75 (Holladay I) Haigis: (a <sub>0</sub> : 1.32, a <sub>1</sub> : 0.400, a <sub>2</sub> : 0.100), Barrett LF: 1.7
Method of Sterilization	Ethylene Oxide (ETO)
ACD*	5.51
UV cut off wavelength at 10% transmittance	388 ± 2 nm
Recommended Insertion Instrument	Preloaded (Push only, Medcel ) : ≥2.4mm Incision*
Package	Soft Hydrophobic Acrylic Intraocular lenses are supplied sterile & dry. SAL PT302A: Preloaded in the injector and packaged in a blister pack and sealed with a Tyvek® cover

A-Constant & ACD\*: These values are shown as guidelines only for use with optical biometry for calculation of implant power. MBI recommend that surgeons develop their own values based on individual technique, measuring equipment and desired post-operative results. In no way are these values meant to be definitive.

Incision\* : Incision sizes are indications only based on average experiences (Medcel AG ). The individually required incision sizes may vary depending on surgical techniques.